


E-TW550125-D

55" FHD Video Wall Dispaly Unit (Ultra Narrow Bezel 3.5 mm)

E 55° YHO Video Wall

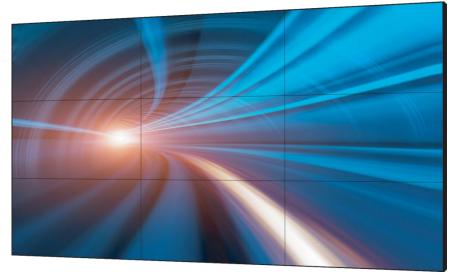

Technical Specification			
Model			
Model	E-TW550125-D		
Display			
Diagonal Size	55"(16:9)		
Panel Type	ADS		
Resolution	1920×1080 (FHD)		
Bezel Width	2.3mm (T/L), 1.2mm (B/R)		
Backlight	Direct LED		
Brightness	500 cd/m ²		
Contrast Ratio	1200:1		
Pixel Density	40dpi		
Viewing Angle	H178°, V178°		
Response Time (G-to-G)	8ms		
Color Depth	8bit (16.7M)		
Color Temperature	10,000K		
Surface Treatment	Haze 25%, 3H		
MTBF	50,000h		
Signals			
Input	CVBS(BNC)×1, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1,USB×2, Audio×1, IR×1		
Output	$CVBS(BNC)\times 1, RS232\times 1, HDMI\times 2, VGA\times 1, Audio\times 1$		

Features:

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 3.5mm)

- Industrial level ADS LCD panel, suitable for continuous 24h/7 operation
- Ultra-narrow 3.5mm bezel-to-bezel design
- Anti-glare panel, vivid and memorable image quality
- · Factory calibration technology for high color uniformity
- Built-in 3D noise reduction system and picture splicing function
- Abundant interfaces HDMI, DVI, VGA, BNC, USB, supporting HDMI daisy chain
- Infrared, RS232 dual mode, supporting remote control by computer
- Professional thermal design to extend device lifespan
- Built-in power, low energy consumption, ultra-quiet
- Modular structure design, multiple installation modes
- Widely used in surveillance center, command center, meeting room, commercial display scenes, etc.















General				
Power Supply	AC100V~AC240V, 50/60 Hz			
Power Consumption (Standby)	<0.5W			
Power Consumption (Typical)	175W			
Power Consumption (Max.)	195W			
Energy Efficiency Class (EU)	G			
Installation Mode	Floor-standing, wall-mounted			
VESA	600×400mm, M6			
Control Mode	Infrared, RS232 dual mode, supporting remote control by computer			
Gross Weight	34.3kg (75.6lb)			
Net Weight	27kg (59.5Ib)			
Product Dimension (W×H×D)	1213.7mm×684.5mm×121.8mm (47.8"×26.9"×4.8")			
Package Dimension (W×H×D)	1360mm×945mm×280mm (53.5"×37.2"×11.0")			
	Temperature	0°C~+40°C		
Operating Environment	Humidity	10%RH~80%RH (non-condensing)		

Dimensions(mm)

